


WOOSTER PRODUCTS INC.


**LADDER TREADS**  
**PER MIL-T-24634 (SH)**

Specify ladder width required 4, 6 or 9 inch.


Complies with MIL-T-24634 (SH) "Treads, compound filled, for inclined ladders." NAVSEA accepted for installation on all U.S. Navy ships.

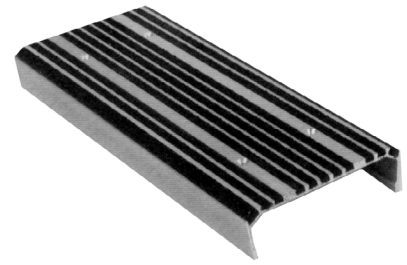

### TYPE I FULL TREAD, 6" Size

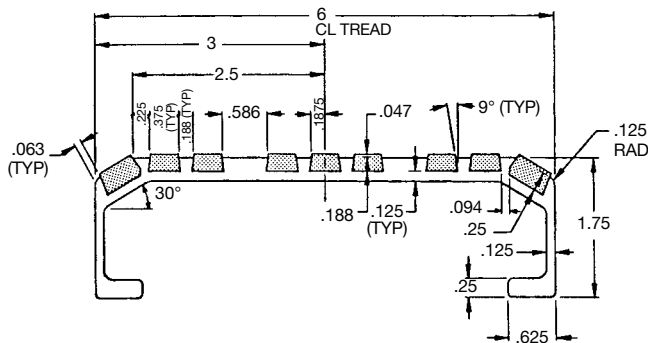


### TYPE II CAP TREAD, 6" Size

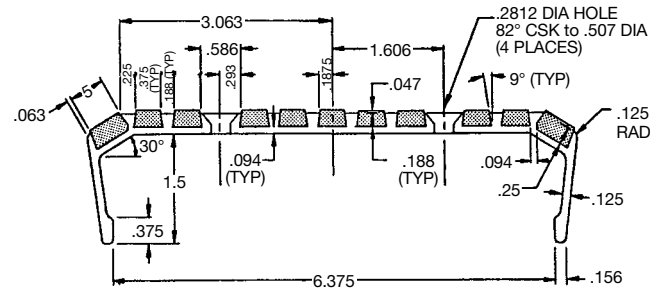

## TYPE 117A LADDER TREADS

Double nose ladder tread, reversible. Treads bolt directly to stringer.

- Abrasive is aluminum oxide integrally cast into the ladder tread surface to a minimum depth of 1/32 inch.
  - Standard holes are 9/16" dia. for 1/2" bolts.
  - Treads are available in the following abrasive cast metals:
    - ALUMINUM** - No. 43 prime and secondary ingot; low copper content; corrosion-resistant.
    - IRON** - Class 20 iron; high silicon; machinable, hyper-eutectic.
  - All the metals have a shot-blast finish. The cast iron treads have a one-coat black paint finish.
  - Cross hatching and fluting is 1/16" deep.
  - Meets F.S. RR-T-650 class 3 and B.U. S1604-860041 type B-2.
- 

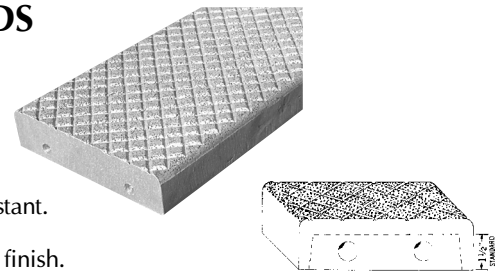



## PHOTOLUMINESCENT ANTI-SLIP STAIR NOSINGS AND TREADS

- Designed to provide luminescent outlines of egress stairs (not designed to provide enough light to illuminate a dark egress path).
- Pigment is embedded in epoxy mixture, so there is slip resistance over entire photoluminescent area.
- Photoluminescence will be recharged by any light source, natural or artificial, indefinitely.
- Brightness rating of stair nosings is IBC and IFC compliant.

## MEA Approved, Meets OSHA and ASTM Requirements

**Stair Treads for new construction** – WP2-NG (see various configurations below), FT3-NG, M231 BF-NG and XT3-NG

### Stair Nosings for renovation – 333-NG and 500-NG

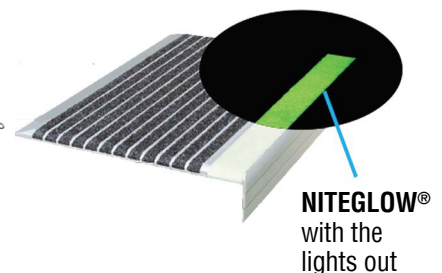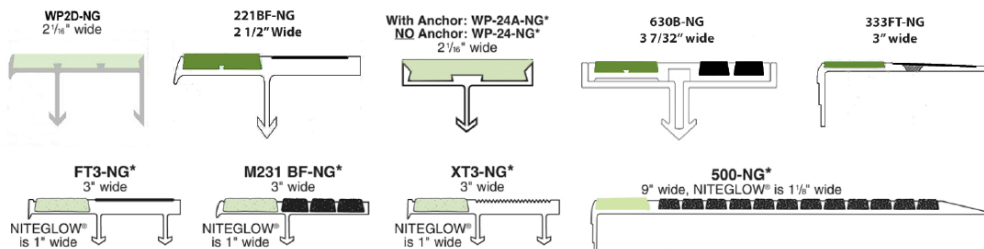

*Also see our full page ad covering safety treads and surfaces.*

*For 96 Years*

**WOOSTER PRODUCTS INC.**

1000 Spruce Street, P.O. Box 6005 Wooster, Ohio 44691

Tel: (330) 264-2844 • Toll Free: 800-321-4936 • Fax: (330) 262-4151

Web-Site: <http://www.wooster-products.com> • E-mail: [Sales@wooster-products.com](mailto:Sales@wooster-products.com)

